

Sentry Basic CDU

Key Features


- > Power Distribution: 110V, 208V, 230V 20 or 30-Amp power input feed
- > Low Density: Single-power input feed; 12 or 24 outlets per enclosure
- > Branch Circuit Protection : Sentry CDUs meet UL 60950-1 requirements
 - > Overcurrent protection with UL-listed Bussman fuses
- > Rack-Mountable : Includes horizontal and Zero U

Low-Density Basic Power Distribution

The Sentry Basic Cabinet (Power) Distribution Unit (CDU) product family provides a simple solution where reliable power distribution for equipment racks and other data center applications is needed. Basic CDU's provide both power distribution and branch circuit protection for the 30-Amp rated devices.

The Sentry Basic CDU offers different input and output connections to distribute 110V, 208V or 230V power and a 20 or 30-Amp power input feed. The 30-Amp model features a combination of white and black outlets to easily distinguish between each branch circuit.

The Sentry Basic CDU meets the criteria of Branch Circuit Protection by providing overcurrent protection with UL-listed Bussman® SC fuses for each branch circuit. Branch circuit protection is accomplished via UL-listed Bussman SC fuses for compliance with UL/CSA 60950-1 and EN 60950-1 standards. The Sentry "Basic" Cabinet Power Distribution Unit (CDU) family provides both a reliable and economical solution for your basic power needs.

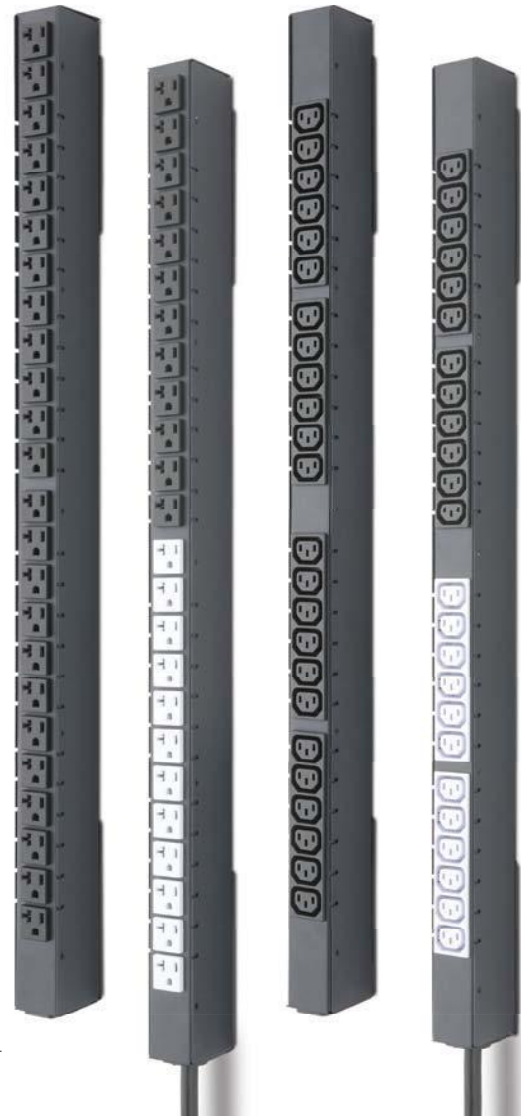

Zero U Vertical



Horizontal 1U or Vertical Mounting

Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensions
CB-12H1-C20*	100-120V 50-60Hz	20A	IEC 60320/C20 Power Inlet**	(12) NEMA 5-20R	17.25" x 1.75" x 2.25"
CB-12H1-L530	100-120V 50-60Hz	30A	NEMA L5-30P Cordset, 10'	(12) NEMA 5-20R	17.25" x 1.75" x 2.25"
CB-12H2-C20*	208-240V 60Hz	20A	IEC 60320/C20 Power Inlet**	(12) IEC 60320/C13	17.25" x 1.75" x 2.25"
CB-12H2-L630	208-240V 60Hz 230V 50-60Hz	30A	NEMA L6-30P Cordset, 10'	(12) IEC 60320/C13	17.25" x 1.75" x 2.25"
CB-24V1-C20*	100-120V 50-60Hz	20A	IEC 60320/C20 Power Inlet**	(24) NEMA 5-20R	31.5" x 1.75" x 2.25"
CB-24V1-L530	100-120V 50-60Hz	30A	NEMA L5-30P Cordset, 10'	(24) NEMA 5-20R	31.5" x 1.75" x 2.25"
CB-24V2-C20*	208-240V 60Hz	20A	IEC 60320/C20 Power Inlet**	(24) IEC 60320/C13	31.5" x 1.75" x 2.25"
CB-24V2-L630	208-240V 60Hz 230V 50-60Hz	30A	NEMA L6-30P Cordset, 10'	(24) IEC 60320/C13	31.5" x 1.75" x 2.25"

Agency Approvals

- > CTUVus – UL 60950-1:2003
- > CAN/CSA 22.2 No. 60950-1-03
- > TUV_GS – EN 60950-1:2001
- > FCC Class A
- > EMC - EN 55022 Class A
EN 55024
- > CE

Power Cord Options

- > PTCORD-1 IEC 60320/C19 - NEMA L6-20P (20A Twist-Lock) 10'
- > PTCORD-2 IEC 60320/C19 - Schuko 10'
- > PTCORD-3 IEC 60320/C19 - IEC 60309 (BS4343, CEE17) 16/20A Blue (UK Commando) 10'
- > PTCORD-4 IEC 60320/C19 - BS1363 13A (UK) 10'
- > PTCORD-5 IEC 60320/C19 - 5-15P (15A Straight-Blade) 10'
- > PTCORD-6 IEC 60320/C19 - 5-20P (20A Straight-Blade) 10'
- > PTCORD-7 IEC 60320/C19 - L5-20P (20A Twist-Lock) 10'
- > PT-ADP-C19 Cable mount IEC 60320/C19 Connector

* Qty (2) units per box

**Power cords sold seperately



Server Technology
Solutions for the Data Center Equipment Cabinet

LAN TEK 1.800.660.2286
P. O. Box 549 1.760.364.2900
Yucca Valley, CA 92286 Fax: 1.760.364.4997

www.lan-tek.net
lantek@earthlink.net